
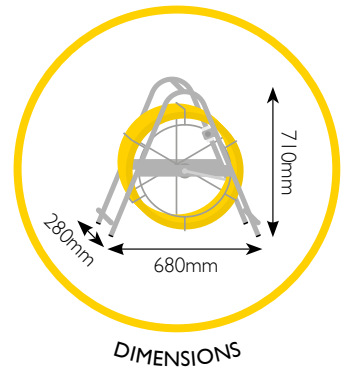
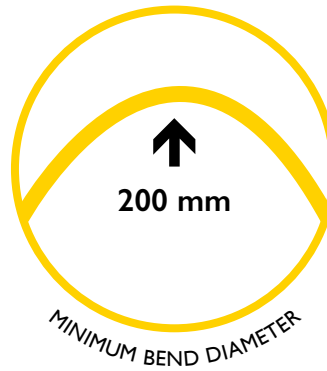
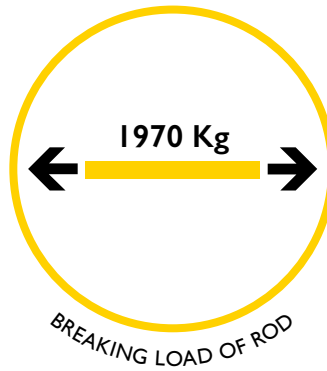


FLEXITRACE 6

ø6mm fibreglass rod
50m – 150m lengths

The Flexitrace system gives a compact and labour saving solution when locating non-metallic ducts and drains. This provides the benefits of a sonde and a continuous trace system in one compact unit. An improved coil size of 10.2mm diameter allows far better flexibility when rodding through small diameter ducts, 22mm water and gas pipes, including the joints and bends on those pipes down to a bend radius of approximately 250mm. Suitable for use with most C.A.T and signal generator systems. Total overall dimensions W 680mm x H 710mm x D 280mm.

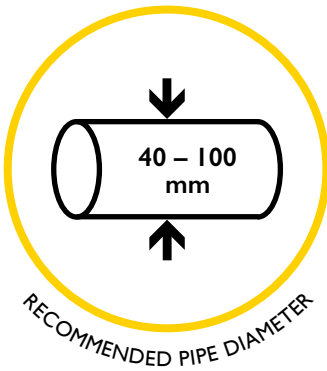

Key Features



SONDE

Used to determine the end point and depth of your non-metallic duct or drain



TRACEABLE ROD

Ideal to trace the route of your non-metallic duct or drain




LIGHTWEIGHT AND COMPACT

Fits in small vehicles

Standard System Lengths

PRODUCT CODE	DIAMETER	LENGTH	WEIGHT
MIDCO50TC6.7	6mm	50m	7.45Kg
MIDCO60TC6.7	6mm	60m	7.88Kg
MIDCO80TC6.7	6mm	80m	8.76Kg
MIDCO100TC6.7	6mm	100m	9.64Kg
MIDCO120TC6.7	6mm	120m	10.52Kg
MIDCO150TC6.7	6mm	150m	11.84Kg


Other lengths available on request.




Modes Of Use

There are two main methods to use the Flexitrace:

Sonde Mode

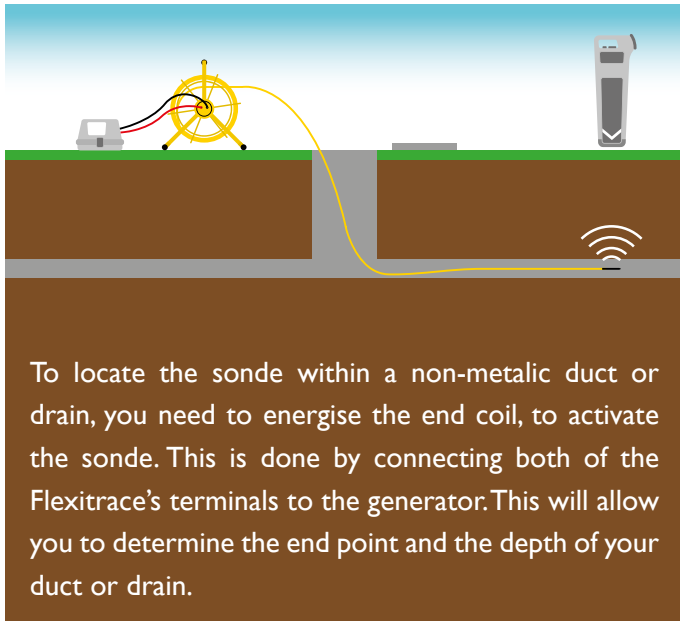

Line Mode

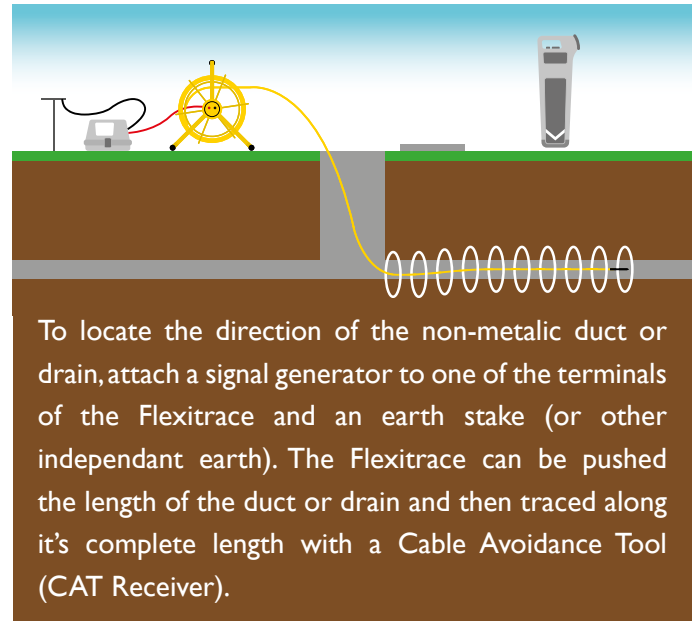

The compact size of the end coil (10.2mm diameter) and the flexibility of the 6mm rod make the Flexitrace particularly suitable for locating narrow ducts. Suitable for use with most C.A.T and signal generator systems.

Rod

- Highest quality 6mm reinforced fibreglass rod complete with two 0.5mm copper trace wires.
- UV inhibited coating.
- Fitted with tuned coil in robust nylon housing at 10.2mm diameter.

Frame

Rugged steel construction with weatherproof powder coat finish. Incorporating compact junction box fitted with quality screw lugs suitable for attaching feeds from a signal generator by fork terminals or crocodile clips.



Scan the QR code for more information on the Cobra Flexitrace

